



LI-FL-100W-4000K



- 5 years warranty use for 10 years
- CREE Chip and Mean Well Driver
- More than 60% energy saving
- High quality power supply, good cooling.
- Optical beam angle, suitable for outdoor stadium illumination

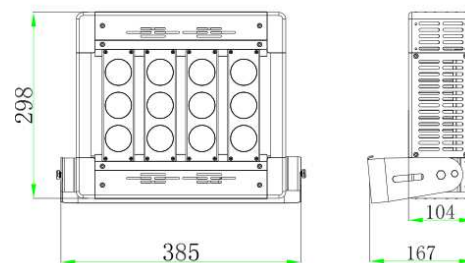

+



Model No.	LI-FL-100W-4000K	
Specification	LED Flood Light	
Power	100w	
Driver	Meanwell	
LED Light Source	CREE	
Luminous Efficiency	100-130lm/W	
Lumen	13000LM	
Color Temperature	Cool White 5700-6500k	
	Pure White 5000k	
	Warm White 2700k-4000k	
Central Illumination and Effective Area	10M Height	191m ² /135Lux
	20M Height	830m ² /42Lux
	30M Height	1632m ² /21.7Lux
	40M Height	2305m ² /13.7Lux

Power Factor	>0.98
Frequency Range	50-60Hz
Power Efficiency	>90%
Input Voltage	100-277VAC
Beam Angle	10/24/38/60/90 Deg
Color Rendering Index	80Ra+
Lifetime	80,000H
IP Grade	IP67
Working Temperature	-40℃ -+80℃
Storage Temperature	-40℃ -50℃ ;10%-90% RH
Light Body Material	Aluminum Alloy
Certificate	CE/FCC/RoHS/DLC
Body Size(mm)	385*298*104
Net Weight(kg)	6